

**OFFICE OF NAVAL RESEARCH**

**GRANT: N00014-93-1-0615**

**R&T CODE: 3132081**

**Scientific Officer: Dr. Kenneth J. Wynne**

**TECHNICAL REPORT NO. 22**

**Photoinduced Birefringence. Holographic Surface Gratings and  
Photorefractive Properties of Azo Polymers**

**by**

**M. S. Ho, C. Barrett, P. Rochon and A. Natansohn**


**Submitted for publication**

**in**

**OSA Technical Digest "Organic Thin Films for Photonic Applications"**

**Department of Chemistry  
Queen's University  
Kingston, On., Canada**

**July 28, 1995**

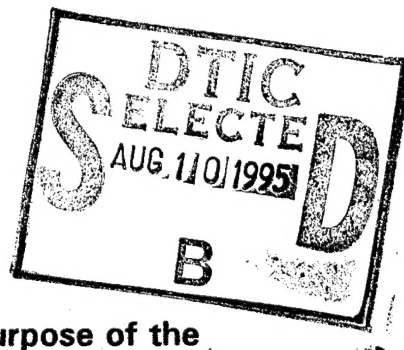

**Reproduction in whole or in part is permitted for any purpose of the  
United States Government**

**This document has been approved for public release and sale;  
its distribution is unlimited.**

**DTIC QUALITY INSPECTED 8**

**19950809 024**

JK

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE July 28, 1995	3. REPORT TYPE AND DATES COVERED Technical Report #22		
4. TITLE AND SUBTITLE Photoinduced birefringence, holographic surface gratings and photorefractive properties of azo polymers		5. FUNDING NUMBERS  N00014-93-1-0615		
6. AUTHOR(S)  M.S. Ho, C. Barrett, P. Rochon and A. Natansohn				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Department of Chemistry Queen's University Kingston, Ontario K7L 3N6 Canada		8. PERFORMING ORGANIZATION REPORT NUMBER  22		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Department of the Navy Office of the Naval Research 800 North Quincy Street Arlington, VA 22217-5000		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES Submitted to Optical Society of America, symposium on Organic Thin Films for Photonic Applications				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Reproduction in whole or in part is permitted for any purpose of the United States Government. This document has been approved for public release and sale; its distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  Films of amorphous high-Tg polymers show an unexpected versatility in terms of device utilization. Reversible optical storage is possible by photoinducing birefringence, and either dots or waveguides can be imprinted. Surface highly efficient gratings can be inscribed, and they can also serve as entry/exit points into waveguides. Finally, switches can be designed by using photorefractive properties.				
14. SUBJECT TERMS holographic gratings, photoinduced birefringence, photorefractivity, azo polymers			15. NUMBER OF PAGES 4	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT unclassified	20. LIMITATION OF ABSTRACT unlimited	

# PHOTOINDUCED BIREFRINGENCE, HOLOGRAPHIC SURFACE GRATINGS AND PHOTOREFRACTIVE PROPERTIES OF AZO POLYMERS

Mei Sing Ho<sup>1</sup>, Chris Barrett<sup>2</sup>, Paul Rochon<sup>2</sup> and Almeria Natansohn<sup>1</sup>

<sup>1</sup>Department of Chemistry, Queen's University, Kingston, Ontario, K7L 3N6

<sup>2</sup>Department of Physics, Royal Military College, Kingston, Ontario, K7K 5L0,  
CANADA

Azo polymers are the subject of an impressive number of publications in the recent literature, due to a variety of possible applications. The main area of interest is in their nonlinear optical (NLO) properties, and azo-containing polymer films have been synthesized, poled and their second harmonic generation and waveguide properties have been investigated. The publication pace on this subject is considerable, and it would be impossible to summarize the most important trends. The general directions of the research are related to improved thermal stability and especially to methods to increased stability of orientation of the azo chromophores. Polyimides and/or crosslinked polymers are the preferred methods to achieve these goals.

There is much more to azo polymers than just nonlinear optical properties. Photoisomerization has been known for a long time, and the photochromism has been proposed as a recording method. The cis isomer is very unstable in all azoaromatic compounds, hence the feasibility of such a recording is very low. As a consequence of photoisomerization, however, the azoaromatic groups are moving within the polymer film and orienting perpendicular to the light's polarization direction. This order/disorder transition can be used to store digital information, but it is inherently slow, since it requires at least a few trans-cis-trans isomerization cycles per azo group. The literature on this subject is also growing rapidly.

More recently, azo compounds have been used as the NLO groups in photorefractive polymers, and the photochemical orientation due to polarized light is used to enhance the photorefractive effect in some polymer films. This use takes advantage of both the NLO and photoisomerization properties of azobenzene group.

We will show in this presentation that both these properties **plus** a third one: surface grating production on polymer films, can be used to obtain almost any active element in a potential photonic device, making azobenzene-containing polymers probably the most versatile materials for photonic applications.

## Photoinduced Birefringence

It is well known that dichroism and birefringence can be induced in either amorphous or liquid crystalline or semicrystalline polymer films. If the polymer is amorphous, the induced birefringence can reach levels of 0.1 and is achieved in a few hundred of milliseconds. The saturation level decays to

a lower level upon termination of the write beam, and this level of the photoinduced birefringence is stable for a very long time (four years have been verified in our laboratory). For liquid crystalline and semicrystalline polymers, the level of orientation is obviously much higher, thus greater photoinduced birefringence can be achieved, but the process is much slower<sup>1</sup>.

Our recent investigations have been limited to amorphous high-T<sub>g</sub> polymers with the scope of understanding the relation between the polymer structure and its optical storage properties. We have proposed a biexponential fit for both the photoinducing birefringence process and the relaxation upon termination of the write beam<sup>2</sup>. The biexponential equations can be used to compare various polymers and the results indicate that the volume of the azo group plays a relatively minor role in orientation, while the polarity is extremely important<sup>3</sup>.

Other studies on copolymers clearly showed that the polarity of the neighboring group plays a crucial role in the mobility of the azobenzene groups. This was revealed studying cis-trans thermal isomerization kinetics<sup>4</sup>, and photoinduced birefringence in copolymers<sup>5,6,7</sup>. An in-situ orientation study was performed by monitoring infrared dichroism while the "writing" process took place. The results clearly show different types of alignment of the azobenzene groups in homopolymers as compared with copolymers<sup>8</sup>.

### Surface gratings

When subjecting an azo-containing polymer film to an interfering pattern generated by two light beams, a volume diffraction grating can be obtained based on variations of the refractive index induced by the orientation of the azobenzene groups. The diffraction efficiency of such a grating is very small, usually below 1%. However, continuous illumination, preferably with circularly polarized light, produces an unexpected motion of polymer molecules to form a fairly deep surface grating<sup>9-11</sup>. An atomic force microscope image of such a surface is presented in Figure 1. The depth, tilt and period of the gratings can be adjusted by modifying the two light beams, the material and/or the exposure time. For the grating shown in Figure 1, with a depth below 100 nm, the diffraction efficiency is 12%, but values as high as 42% and depths of about 1  $\mu\text{m}$  have been obtained.


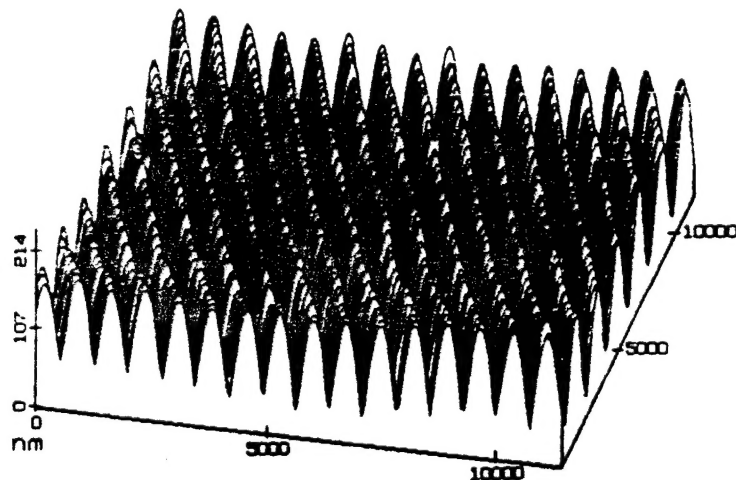


Figure 1. Diffraction gratings inscribed on a copolymer containing 25 mol% azo structural units.

## Carbazole-containing polymers: single-unit photorefractive polymers

Azo groups are being used to provide the necessary nonlinear optical properties of photorefractive polymers<sup>12</sup>. Apart from the NLO component, a photoconductive component is necessary, and the traditional route has been to work with a photoconductive polymer with the NLO component added to the composition. In the example above, a third component was necessary to lower the glass transition temperature of the film in order to allow for poling at a reasonable temperature. Alternatively, both the photoconductive and the NLO sites could be attached to the same polymer by chemical bonds<sup>13</sup>.

In fact, the two sites can be linked together into a single monomer unit if a photoconductive moiety is being made part of the azo group. The most obvious moiety would be carbazole, which is a known photoconductor in the UV region. When poly(N-vinylcarbazole) was used in photorefractive polymers, a charge transfer complex with an electron acceptor was usually prepared by addition of an appropriate electron accepting compound, sensitizing the mixture in the visible range of the spectrum. Binding carbazole in such a way that its nitrogen would be the electron-donor substituent on the azobenzene group avoids the requirement of sensitization in the visible region, since the absorbance maximum of the resulting compound is well above 400 nm. The formula of the proposed structural unit is presented below:

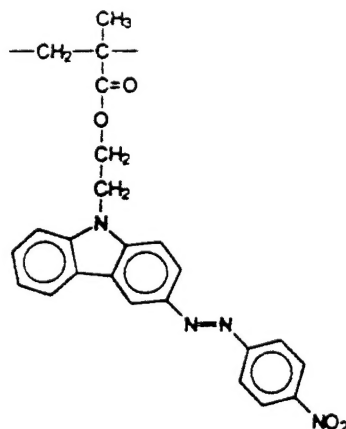

Such a polymer has a  $T_g$  of  $160^\circ\text{C}$ <sup>14</sup> and decomposes at  $260^\circ\text{C}$ . Its maximum absorbance in film form is at 428 nm. Birefringence can be induced on the polymer film to a level of 0.09, at a relatively fast rate (equivalent exponential rate constant of  $2.7\text{ s}^{-1}$ ), and 90% of the photoinduced birefringence is conserved in the film at room temperature for an indefinite length of time. This polymer is also amenable to surface gratings inscription, by the procedure described<sup>10</sup>, and diffraction efficiencies of 25% are easily obtained.

The most interesting feature of this polymer, however, is the fact that it is photorefractive. To obtain two-beam coupling gains, the polymer film has to be poled first, and poling can be performed at room temperature, taking advantage of the motion induced by the trans-cis-trans isomerization cycles of the azobenzene groups. Illumination with a polarized laser can be performed in an electric field, producing not only directional alignment, as in

photoinduced birefringence, but polar alignment as well. Then, two-beam coupling gains can be measured on the photorefractive film. A normalized beam-coupling energy-transfer coefficient of  $\Gamma = 5500 \text{ cm}^{-1}$  before absorption losses is observed on a fairly thin film. Absorption losses are  $11,000 \text{ cm}^{-1}$ .

### Potential for devices

Stable birefringence can be locally induced and erased on a polymer film made of an azobenzene-containing polymer at a very high resolution. The birefringence can be used as a memory bit, or can be used for waveguide purposes. A "printed circuit" of waveguides can in principle be drawn on such a polymer film. At the points of incidence with a light beam coming from outside the film, the surface grating can be used to couple the external beam into and out of the polymer film. Such a surface grating can be obtained by exclusive optical means and its efficiency and direction of guiding are adjustable. Such a grating can also be erased, although local heating would be required for erasing. Finally, by local poling on films with photorefractive properties, optical switches can be obtained. In principle, such an integrated circuit can be changed at will using only optical means.

Azo-containing polymers show such a wide range of useful properties that their serious investigation has probably only begun.

### References

1. A. Natansohn, P. Rochon, M. Pézolet, P. Audet, D. Brown and S. To, *Macromolecules*, **27**, 2580 (1994).
2. M. S. Ho, A. Natansohn and P. Rochon, *Macromolecules*, submitted.
3. M. S. Ho, A. Natansohn, C. Barrett and P. Rochon, *Can. J. Chem.*, in press.
4. C. Barrett, A. Natansohn and P. Rochon, *Macromolecules*, **27**, 4781 (1994).
5. D. Brown, A. Natansohn and P. Rochon, *Macromolecules*, submitted.
6. M. S. Ho, A. Natansohn and P. Rochon, *Macromolecules*, submitted.
7. X. Meng, A. Natansohn, C. Barrett and P. Rochon, in preparation.
8. M. Pézolet and T. Buffeteau, in preparation.
9. P. Rochon, J. Mao, A. Natansohn and E. Batalla, *Polym. Prepr. (ACS)*, **35**(2), 154 (1994).
10. P. Rochon, E. Batalla and A. Natansohn, *Appl. Phys. Lett.*, **66**, 136 (1995).
11. D. Y. Kim, S. K. Tripathy, L. Li and J. Kumar, *Appl. Phys. Lett.*, **66**, 1166 (1995).
12. K. Meerholz, B. L. Volodin, Sandalphon, B. Kippelen, N. Peyghambarian, *Nature*, **371**, 497 (1994).
13. Z. Peng, Z. Bao and L. Yu, *J. Amer. Chem. Soc.*, **116**, 6003 (1994).
14. M. S. Ho, C. Barrett, J. Paterson, A. Natansohn and P. Rochon, *J. Amer. Chem. Soc.*, submitted.

Accession For	
NTIS	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	